



Automatic Horizontal Chicken Breast Slitter Slicing Machine

Multiple slices with Horizontal cutting also capable of **butterflying**.

Suitable for fresh **pork, beef, lamb** and **poultry**



Type of combination Cutting:

- Both lanes multilayer horizontal cutting
- Both lanes butterfly cutting
- One lane butterfly – One lane multilayer cutting

Description:

- High cutting precision, multiple slices in single cut with minimum thickness of 3mm, maximum thickness of 50mm.
- Through blade cassette changing, switch between chicken breast slicing function and butterfly cutting function as well as cutting thickness adjustment is easily and quickly completed.
- Floating upper belt, wide application for different pre-cut thickness.
- Multilayer cutting of different thickness.
- Double feeding operation, high yield, 120 pieces/min.
- Quality module type mesh belt, long life guaranteed.
- SIEMENS electrical parts, CE approved safety service.
- Made in stainless steel and engineering plastic, easy to clean and HACCP standard.
- Easy operation and low maintenance cost.

Technical Parameters


Belt Width	2 x 156 mm
Belt Speed	3~15m/min
Cutting Speed	120 pcs/min (Dual Lane)
Max Product width Input	140 mm
Max Product Height Input/Output	Based on Height of Guiding Bar + 5mm of product height
Cutting Thickness Minimum	3 mm
Cutting Thickness Maximum	Depends on metal guide combination (see chart below)
Power	1.9kW (220V 60Hz 3Ph)
Overall Dimension	1780 x 1150 x 1430 mm

Metal Guide Combination Chart


Number of horizontal multilayer blades are based on height of guiding bar.

Tip: Product should always be 5mm higher than guiding bar.

Height of Guiding bar	3mm Metal guide	4mm Metal Guide	5mm Metal Guide
20mm	No. of blades - 6	No. of blades - 5	No. of blades - 4
25mm	No. of blades - 8	No. of blades - 6	No. of blades - 5

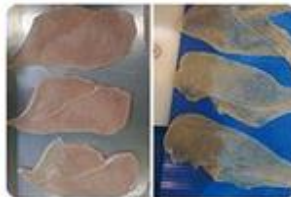

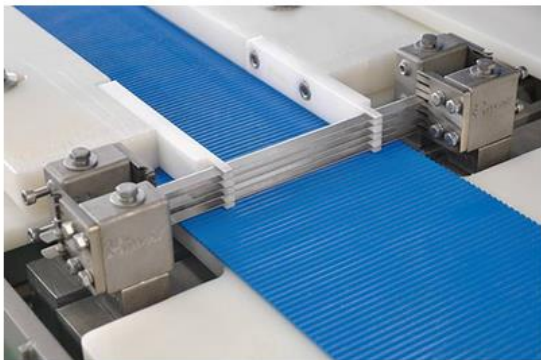


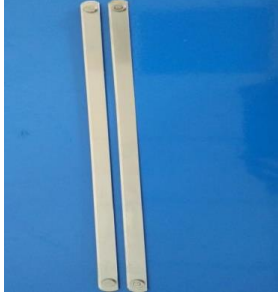



multi-layer blade design, with minimum thickness to 2.5mm and max 8 layers.





Easy-to-disassemble belts ensure the comprehensive cleaning.



Spare Parts List

No.	Spare Part Name	Photo			Quantity (for one lane)	Quantity (for two lanes)
1	Metal Guides	3mm 	4mm 	5mm 	4	8
2	Standard Horizontal Blade					Total 20 blades with machine
3	Supporting Guide Comb				2	4
4	Guiding bars				2	4
5	Butterfly cutting knife				1	2

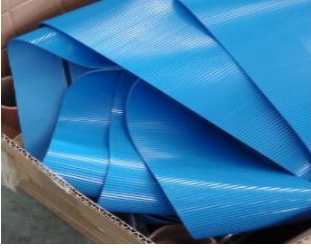6	Upper Belt		1	2
7	Lower Belt		1	2